




Mod. **4220** Testina 4 griffe attacco 10x1.  
*4 jaw coupler thread 10x1.*

Mod. **4225** Testina 3 griffe a 90°.  
*3 jaw 90° angled coupler.*

Mod. **4226** Testina per ingrassatori "Es15".  
*Hook on coupler "Es15".*

Mod. **4227** Testina rovesciata.  
*Grease fitting turn coupler.*

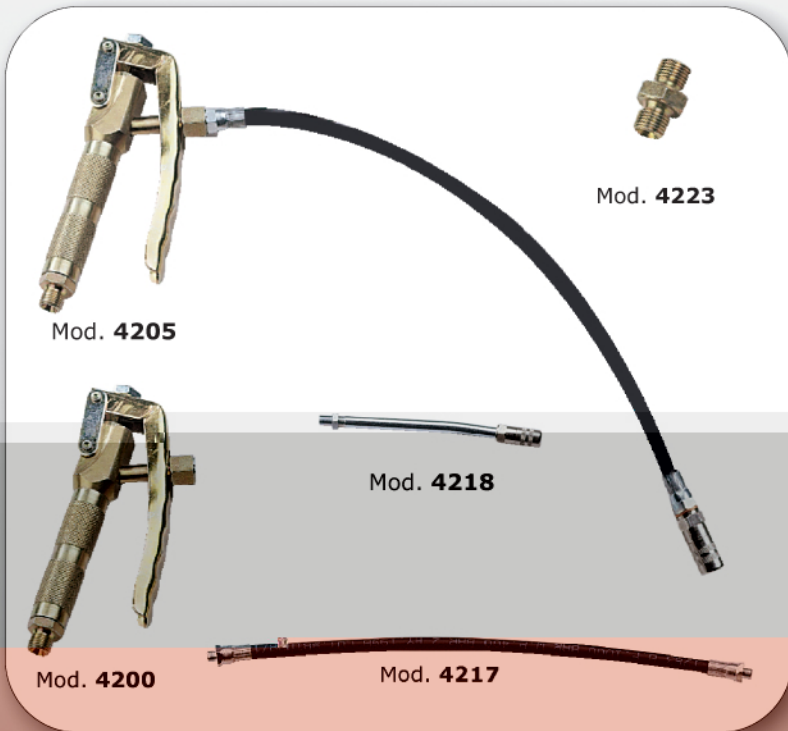


Mod. **4200** Pistola con corpo in acciaio per grasso attacco M 1/4" BSP uscita 10x1.  
*Grease gun steel body, in-thread M 1/4" BSP out-thread 10x1.*

Mod. **4205** Pistola in acciaio per grasso completa di tubetto e testina 4 griffe.  
*Grease gun steel body with flexible hose and 4 jaw coupler.*

Mod. **4217** Tubetto flessibile in gomma attacchi M 10x1 lunghezza 400 mm.  
*Rubber flexible hose thread M 10x1 length 400 mm.*

Mod. **4218** Tubetto rigido con testina 4 griffe.  
*Rigid pipe with 4 jaw coupler.*

Mod. **4223** Raccordo M+M 1/4" BSP.  
*Adapter M+M 1/4" BSP.*

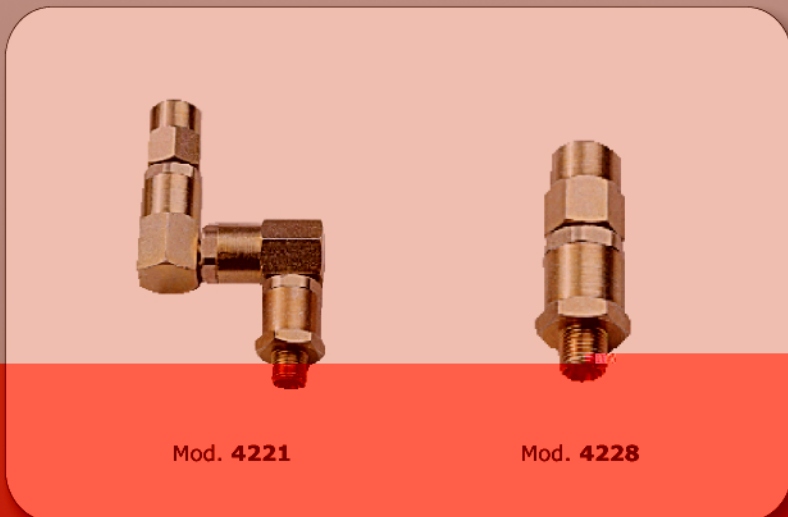

Mod. **4221** Giunto snodabile triplo, attacchi M-F 1/4" BSP. Inserito tra tubo e pistola, permette una rotazione completa ed indipendente sui tre assi anche con tubo in pressione.  
*Swivel joint, thread M-F 1/4" BSP. Connected between hose and gun, allows a complete three axis rotation also if the hose is under pressure.*

Mod. **4228** Giunto girevole in linea, attacchi M-F 1/4" BSP. Inserito tra tubo e pistola, permette una rotazione completa ed indipendente su un asse anche con tubo in pressione.  
*Straight swivel joint, thread M-F 1/4" BSP. Connected between hose and gun, allows a complete one axis rotation also if the hose is under pressure.*